

PRODUCT SPECIFICATIONS – CISCO 12X


Videoconferencing	<ul style="list-style-type: none"> Codec <ul style="list-style-type: none"> • Cisco Webex Room Kit Plus codec Camera <ul style="list-style-type: none"> • Sony SRG-120DU camera 12x optical/12x digital zoom
Display	<ul style="list-style-type: none"> • 27" IPS LED • 2560 x 1440 Native Resolution • 178° Viewing Angle • 5 ms Response Time
Tactile Control Panel	<ul style="list-style-type: none"> • AutoDial/Connect • Disconnect • Camera Pan/Tilt/Zoom • Self-View (Secondary Function: Display Layout) • Camera Mute (with LED indicator) • Microphone Mute (with LED indicator) • PC Source Selection (with LED indicator) • Horus Scope Source Selection (with LED indicator) • Volume Up/Down • Stethoscope Mode (with LED indicator) • Headphone Mode (with LED indicator) • "On-Air" LED Indicator
Remote Control Port	RJ45 for optional Cisco Touch 10 Control panel
Auxiliary Ports	<ul style="list-style-type: none"> • DB9 expansion control port (for future use) • Dual USB 3 Ports on display for powering optional accessories • System USB 3 Port (Supplied with blanking cover - Future use) • Codec maintenance Port (For qualified engineering usage)
Network	<ul style="list-style-type: none"> • 1 x 10/100/1G Ethernet • Wi-Fi capable (Requires optional Cisco Touch 10 controller to configure)
Video Inputs	<ul style="list-style-type: none"> • Sony SRG-120DH camera 12x optical/12x digital zoom • 1 x HDMI designated for PC Input • 1 x HDMI designated for Horus Scope Input
Video Output	1 x HDMI (dedicated to display)
Audio Input	<ul style="list-style-type: none"> • Integrated microphone • 1 x 3.5mm 3 pole, front mounted, for electronic stethoscope • 1 x 3.5mm 4 pole includes phantom power for Auxiliary Cisco Microphone
Audio Output	<ul style="list-style-type: none"> • Integrated stereo speakers; 2 x 5 Watts • 1 x 3.5mm (for headphone)
Dimensions (includes camera)	<ul style="list-style-type: none"> • 24" Wide • 21" High (Detachable Speaker Deflector adds 1.25") • 5.5" Deep
Weight	28.7 lbs
Mounting	Compatible with 100mm x 100mm VESA mounts
Electrical	<ul style="list-style-type: none"> • 100-240V-50/60Hz, 21A - 1.05A • Integrated auto sensing power supply • 1 x IEC type inlet

All specifications are subject to change

Iron Bow Healthcare Solutions, MEDiC™ and CLINiC™ logos are trademarks or registered trademarks of Iron Bow Technologies. (c) Iron Bow Healthcare Solutions. All rights reserved.

Patent Pending.

PRODUCT SPECIFICATIONS – CISCO 12X

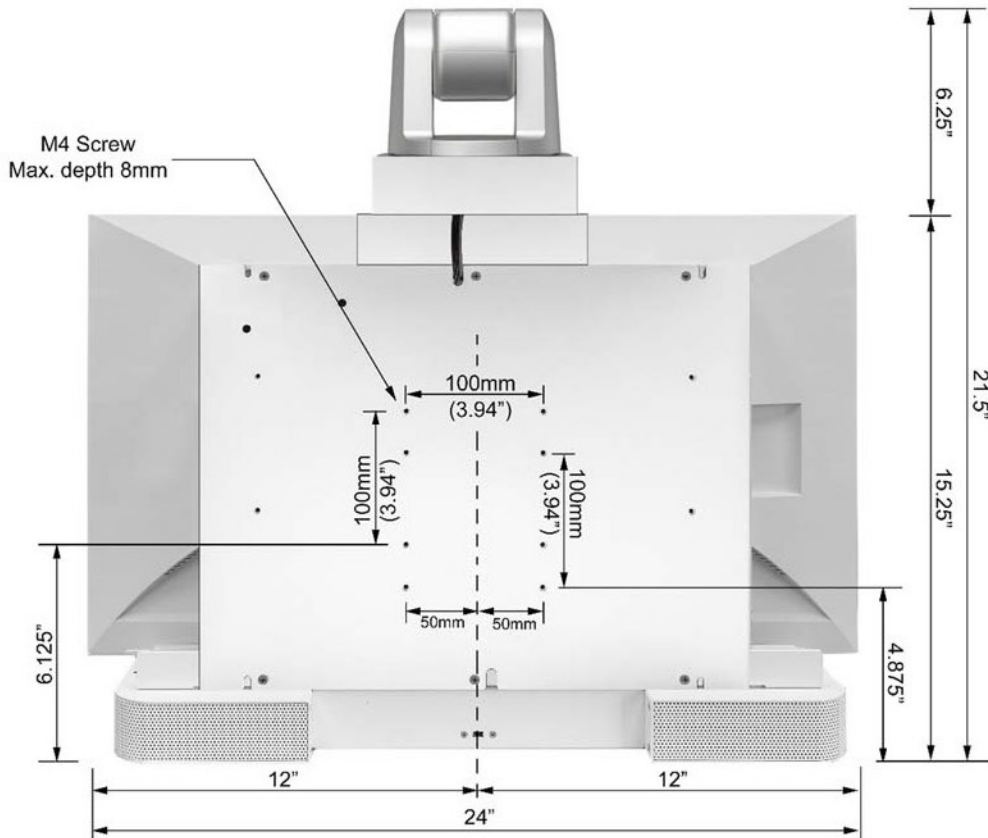

All specifications are subject to change

Iron Bow Healthcare Solutions, MEDiC™ and CLINiC™ logos are trademarks or registered trademarks of Iron Bow Technologies. (c) Iron Bow Healthcare Solutions. All rights reserved.

Patent Pending.